


HDMI 2.0 CABLE + METALLIC HDMI CONNECTOR

**HDMI
2.0**



- BC polished copper conductors Ø 0.50 mm
- Screened of the pairs in aluminum tapes and an overall braided aluminum screen to protect the conductors from possible external interference.
- PVC cover with a diameter of 9.00 mm compatible with our HDMI 2.0 connector.
- Supports the HDMI 2.0 standard up to 20 meters without the need for intermediate signal amplifiers.
- 4K resolution (4096 x 2160 / 60 fps), transfer rate of 18 Gbps.
- 19+1 contact cable that supports HDR technology, 100 Mbps Ethernet and up to 32 1536 kHz audio channels.
- Compatible with HDMI versions 1.4 and earlier up to 20 meters.

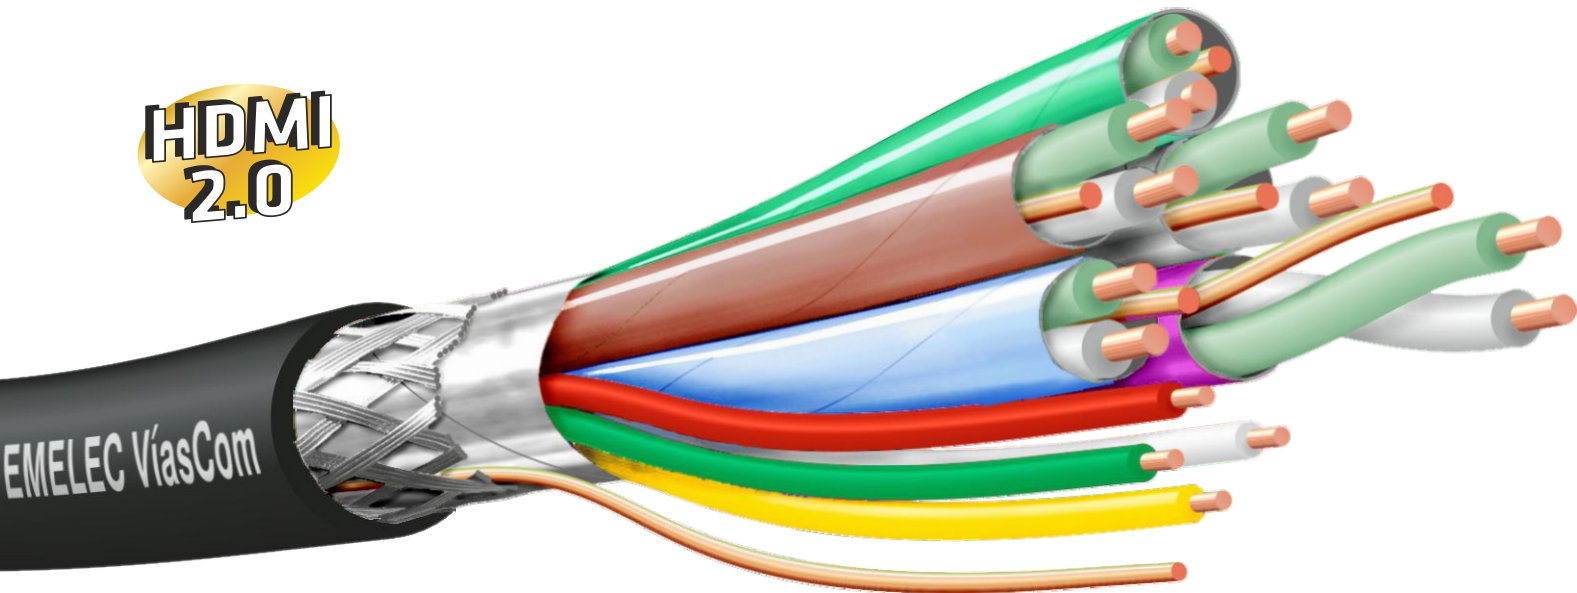



- 19+1 pin HDMI 2.0 connector.
- Robust metal outer body.
- Gold contacts.
- Assembly by screwdriver, without welding.
- Conductors with diameters up to Ø 0.50 mm.
- Cables with diameters up to Ø 9.00 mm.

HDMI 2.0 CABLE + METALLIC HDMI CONNECTOR

Code	Description	Presentation
Q11-188	Cable HDMI 2.0	50 m / Reel
Q11-188/250	Cable HDMI 2.0	250 m / Reel
CH001	Connector HDMI	1 u. / Reel


WIRING

CH001 Connector

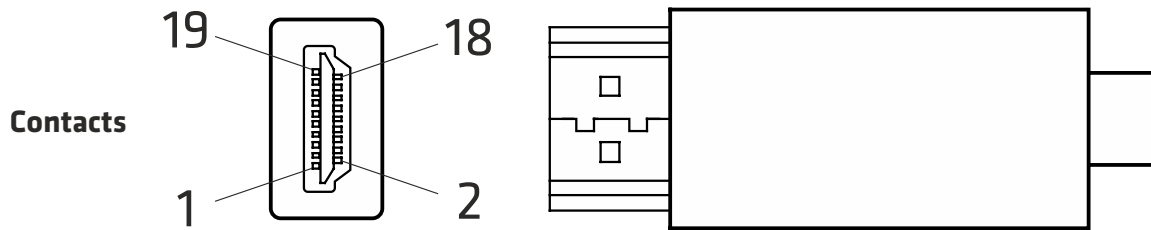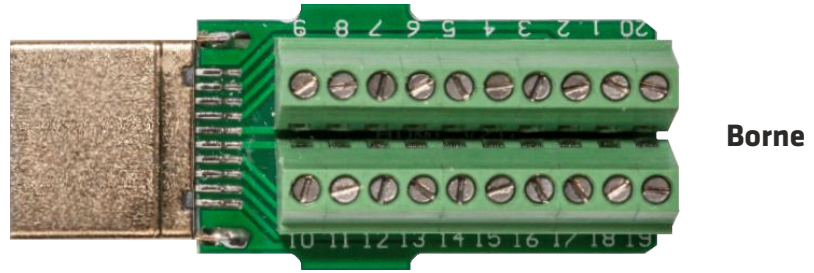

Q11-188 Cable

Composition

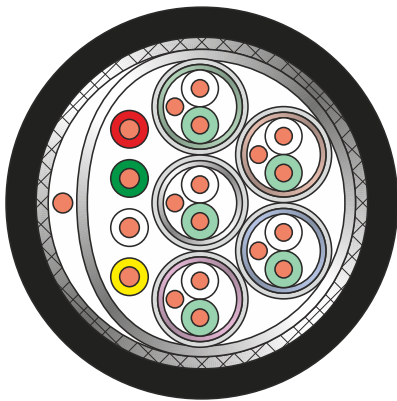

NOTE:
This is a diagram example for the wiring of the HDMI cable.

Colors are not relevant or standardized, they may vary depending on the HDMI cable used.

The 4 individual conductors have to be connected to pins 13, 15, 16 and 18 regardless of color.

The same happens with the 5 pairs, the order of the colors is not decisive but it is important that the groupings of the pairs with their drains connect the indicated pins three by three in the corresponding numbers.

Wiring diagram (with recommended wiring colors)

