

EQ6022 - LAN HOSES 2 x CAT.6 SF/UTP + POWER SUPPLY 2,5 mm² RJ45 + Power Supply connectors

NEW

EQ6022/E/02/XXXX



EQ6022/E/03/XXXX



EQ6022/E/04/XXXX



EQ6022/T/02/XXXX



EQ6022/T/03/XXXX



EQ6022/T/04/XXXX



EQ6022/R/02/XXXX



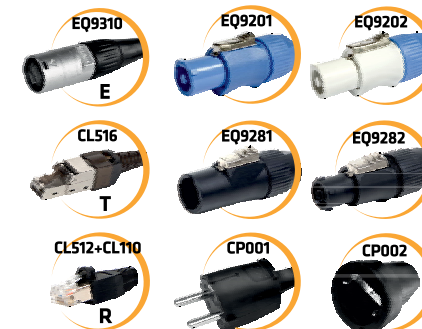
EQ6022/R/03/XXXX



EQ6022/R/04/XXXX

Description

- Range of Flexible 2 x Category 6 Hybrid Connection plus Power Supply.
- 2 x CAT.6 SF/UTP LAN cable with 23AWG solid conductors, with Ø 6,30 mm PVC jacket.
- Power Supply of 2.5 mm² section with cover.
- Suitable for transmission of digital audio signals and power supply in the same cable.
- Flexible cables, with resistant PVC covers. Ideal for mobile applications.
- 1 m stripping of the outer cover at both ends.
- Transparent sleeves at both ends for labelling.
- Offered with Emelec ViasCom® connectors and with Neutrik® connectors.
- References manufactured on demand.

**Coding****EQ6022/x/nn/XXXX**

Cable	LAN Connectors	Power	Length	
Q16-6022	E: Body RJ45 R: RJ45 T: RJ45 Toolless	02 Power Connector 03 Schuko 04 Power True	0010 1,0 m 0020 2,0 m 0030 3,0 m 0050 5,0 m 0070 7,0 m 0100 10,0 m 0150 15,0 m 0200 20,0 m	0300 30,0 m 0400 40,0 m 0500 50,0 m 0600 60,0 m 0700 70,0 m 0800 80,0 m 0900 90,0 m

Composition**Emelec ViasCom® Cable Q16-6022**
2 x LAN CAT.6 SF/UTP

Conductors: 4x2x23AWG BC (1/0,53)
 Shields: Al Tape 100% coverage + TC braid global
 Jacket: PVC Flexible Ø 6,30 mm
 Colour: Black Numbered

Power Supply

Conductors: 1x3x2,50 mm² BC
 Jacket: PVC Flexible Ø 10,00 mm
 Colour: Black

Global Jacket

Jacket: PVC Flexible Ø 22,10 mm
 Colour: Black

Emelec ViasCom® Connectors*

E Body RJ45 + RJ45 50µ (EQ9310 + CL512) | LAN
 T RJ45 50µ Toolless (CL516)
 R RJ45 50µ (CL512)

EK9006/B XLR F 3 pins Metallic Black | XLR 3
 EK9001/B XLR M 3 pins Metallic Black
 EK9008/B XLR F 5 pins Metallic Black | XLR 5
 EK9003/B XLR M 5 pins Metallic Black

EQ9201 Power Connector IN | POWER 02
 EQ9202 Power Connector OUT
 CP001 Schuko M | POWER 03
 CP002 Schuko F
 EQ9281 Power True M | POWER 04
 EQ9282 Power True F

* Possibility of using Neutrik® connectors:
 EtherCON® + RJ45 50µ (NE 8 MX-1 + CL512)
 and NC 3/5 MXX (XLR M 3/5P) + NC 3/5 FXX (XLR F 3/5P)

* Add "K" to the end of the code to indicate Neutrik® connectors