

R-DAT-6024 - LAN HOSES 4x CAT.6 SF/UTP
+ POWER SUPPLY 2,5 mm² CABLE REEL

NEW




R-DAT-6024/E



R-DAT-6024/TC

Connectors

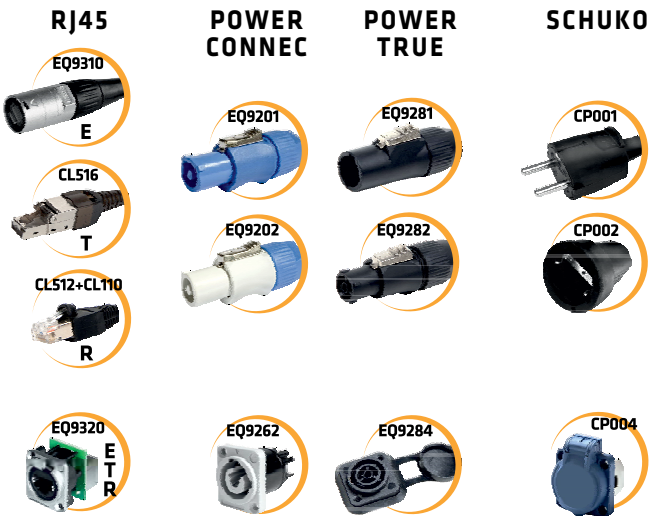

Description

- Range of Flexible four Category 6 Hybrid Connection plus Power Supply.
- 4 x CAT.6 SF/UTP LAN cable with 23AWG solid conductors, with Ø 6,30 mm PVC jacket.
- Power Supply of 2.5 mm² section with cover.
- Suitable for transmission of digital audio signals, DMX signals and power supply in the same cable.
- Flexible cables, with resistant PVC covers. Ideal for mobile applications.
- 1 m stripping of the outer cover at both ends.
- Transparent sleeves at both ends for labelling.
- Offered with Emelec ViasCom® connectors and with Neutrik® connectors.
- References manufactured on demand.



Coding

R-DAT-6024/xC/nn/XXX

Cable	LAN Connectors	Reel Ending	Power Connectors	Length	Reels
Q16-6024	E: Body RJ45	C: With Chassis in the front panel	02: Power Connector	030 30,0 m	EVR-470
	R: RJ45		03: Schuko	040 40,0 m	
	T: RJ45 Toolless		04: Power True	050 50,0 m	
		None: Both ends in line		060 60,0 m	EVR-530

Composition

Emelec ViasCom® Cable Q16-6024

4xLAN CAT.6 SF/UTP
Conductors: 4x2x23AWG BC (1/0,53)
Shields: Al Tape 100% coverage + TC braid global
Jacket: PVC Flexible Ø 6,30 mm
Colour: Black Numbered
Power Supply
Conductors: 1x3x2,50 mm² BC
Jacket: PVC Flexible Ø 10,00 mm
Colour: Black
Global Jacket
Jacket: PVC Flexible Ø 24,80 mm
Colour: Black

Emelec ViasCom® Connectors*

E Body RJ45 + RJ45 50µ (EQ9310 + CL512)
T RJ45 50µ Toolless (CL516)
R RJ45 50µ (CL512)
EC / TC / RC Chassis Body RJ45 CAT.6 (EQ9320)

EQ9201	Power Connector IN	POWER 2
EQ9202	Power Connector OUT	
EQ9262	Chassis Power Connector OUT	
CP001	Schuko M	POWER 3
CP002	Schuko F	
CP004	Chassis Schuko F	
EQ9281	Power True M	POWER 4
EQ9282	Power True F	
EQ9284	Chassis Power True F	

* Possibility of using Neutrik® connectors: EtherCON® + RJ45 50µ (NE 8 MX-1 + CL512) and NC 3/5 MXX (XLR M 3/5P) + NC 3/5 FXX (XLR F 3/5P)
* Add "K" to the end of the code to indicate Neutrik® connectors